
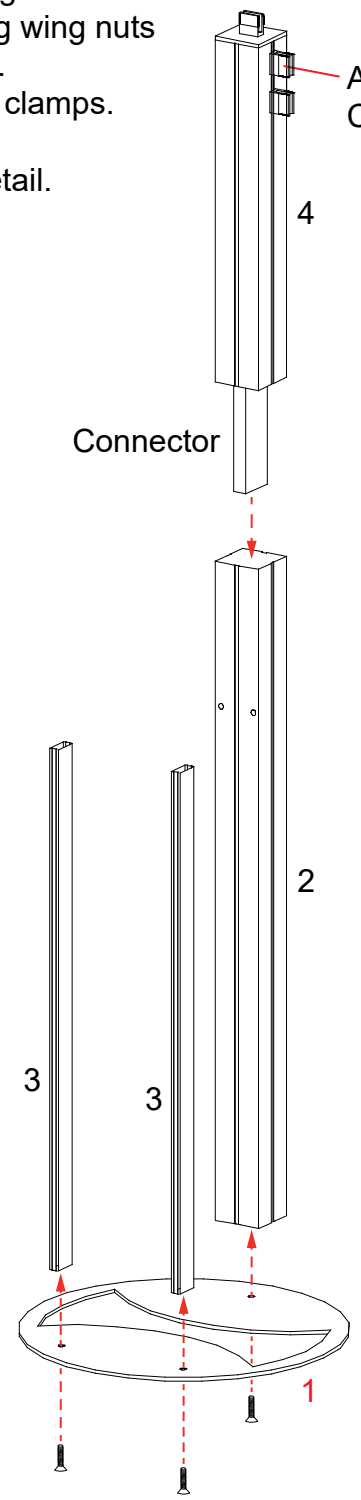
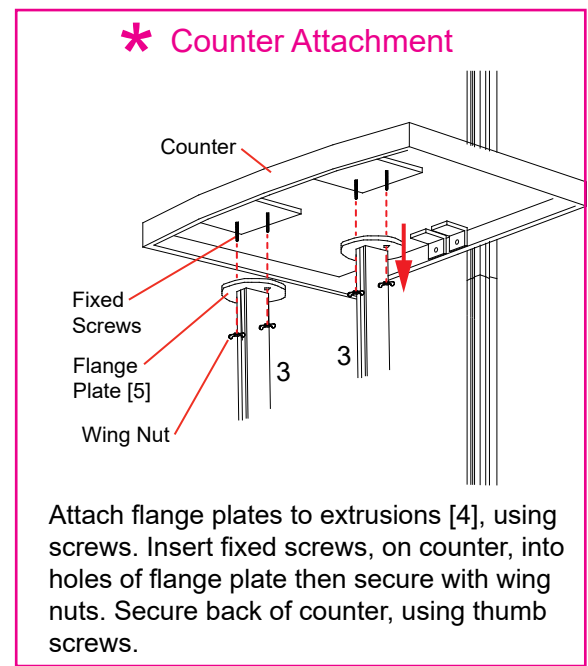
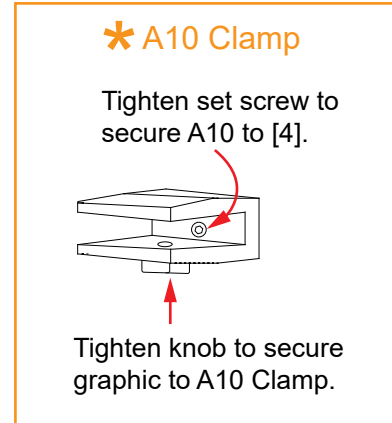


**Steps:**





- 1) Attach lower verticals [2] and [3] to base plate [1], using bolts.
- 2) Attach upper vertical [4] to lower vertical [2], using connector.
- 3) Attach shelves to vertical [2].
- 4) Attach large graphic to verticals [3], using screw caps. See **Large Graphic Attachment** detail.
- 5) Attach flange plates [5] to tops of verticals [3], using bolt.
- 6) Attach counter to flange plates [5] vertical [2], using wing nuts and thumb screws. See **Counter Attachment** detail.
- 7) Attach small and curved graphics to [4], using A10 clamps. See **A10 Clamp** detail.
- 8) Attach monitor mount to [4]. See **Monitor Mount** detail.

Item	Qty.	Description
1	1	Base Plate
2	1	48" Q914 Vertical Extrusion
3	2	38" Z45 Vertical Extrusion
4	1	25" Q914 Vertical Extrusion w/ Cap, Clamps, and Connector
5	2	Flange Plate
--	3	Shelf

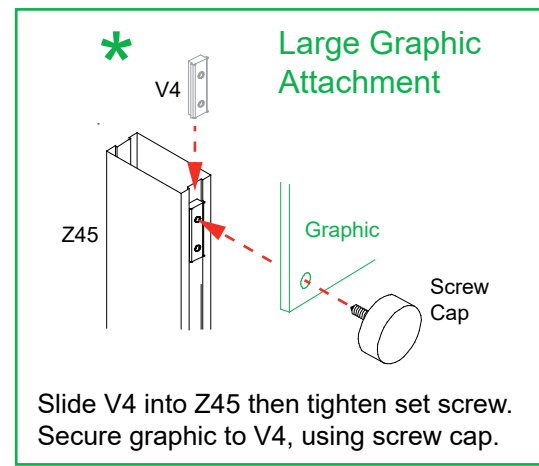

Keep A10 clamps attached to [4] when packing.


Keep connector with set screws attached to [2] when packing.

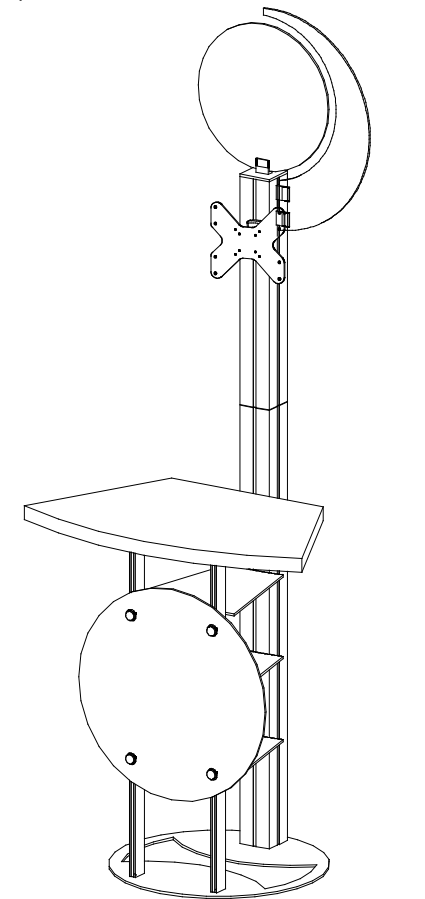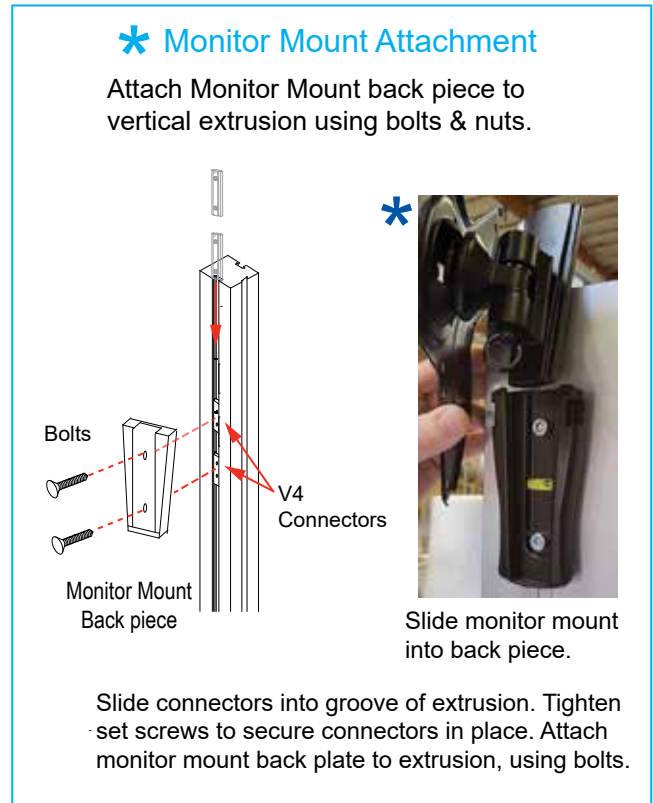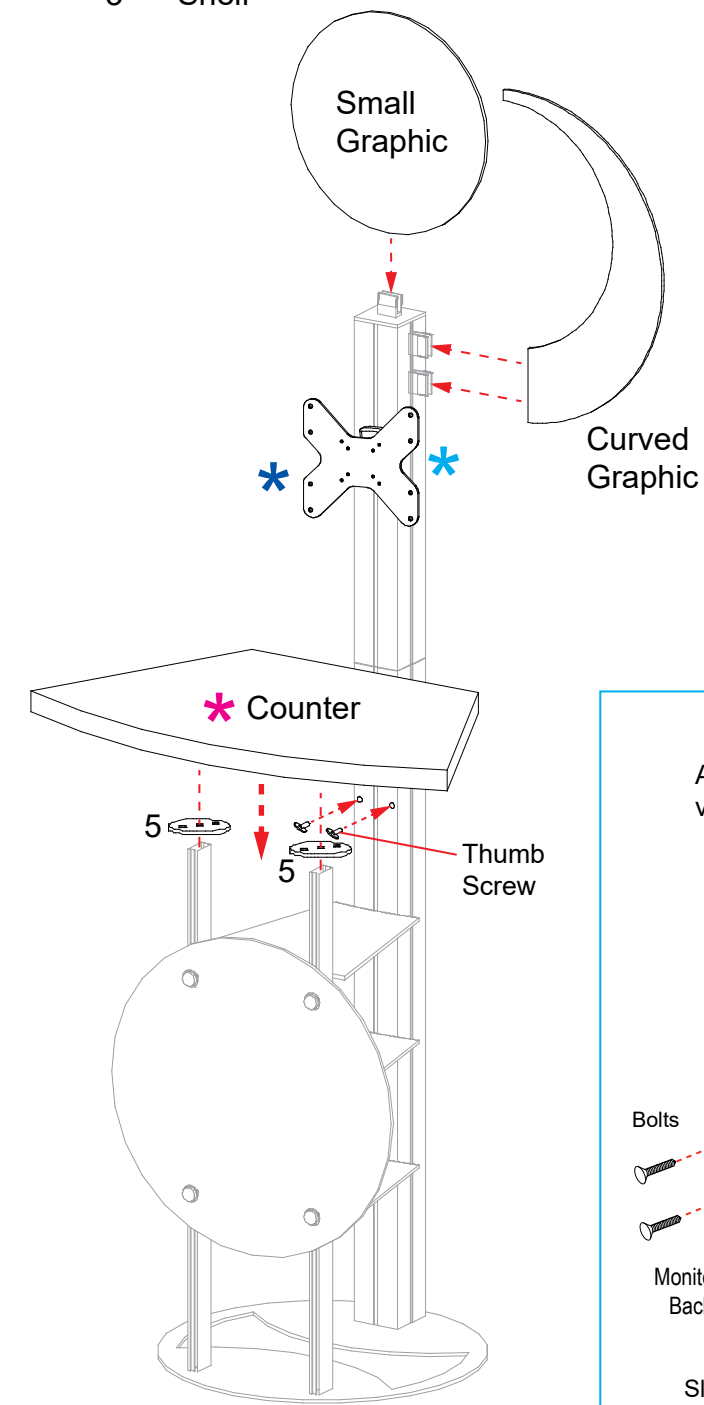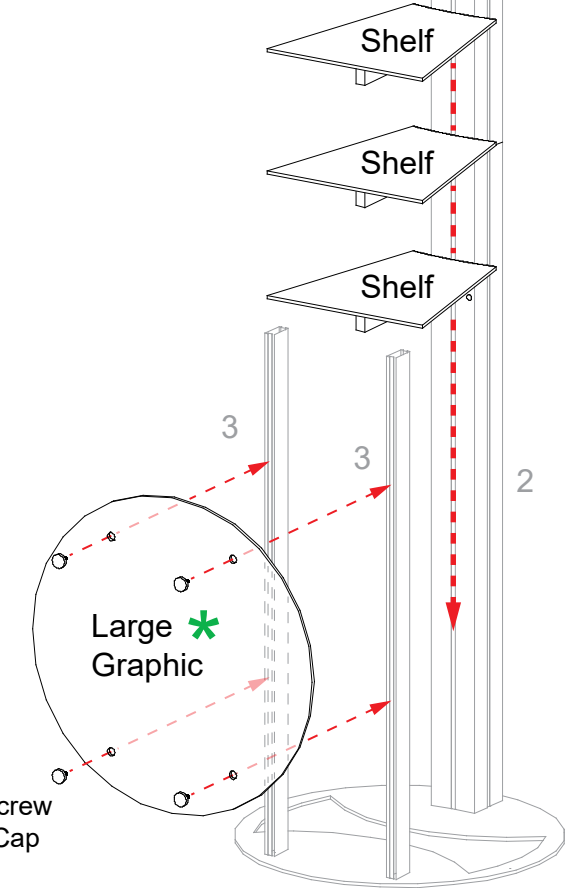


**SETUP INSTRUCTIONS**

## General Setup Instructions

- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

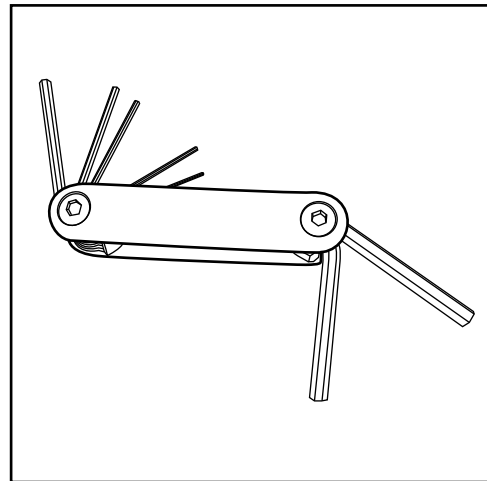

Hex Tool - Essential for Assembly

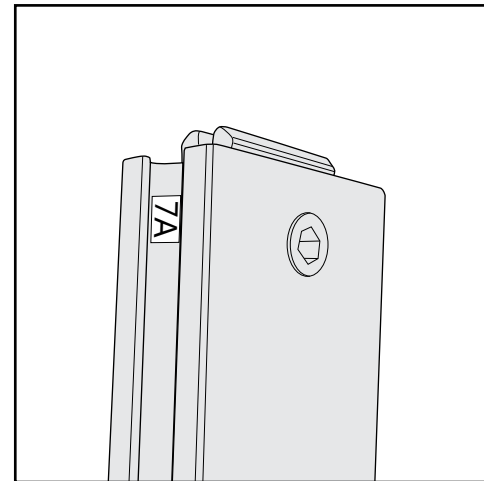

Part Identification - Numbering




# WARNING

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly

- For loss prevention, tighten all set screws and locks during disassembly.

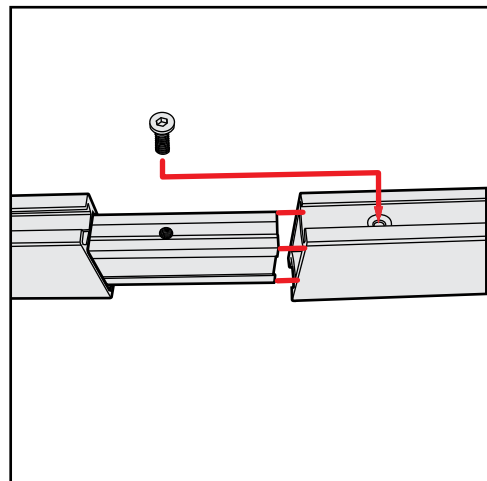

Spline Connection

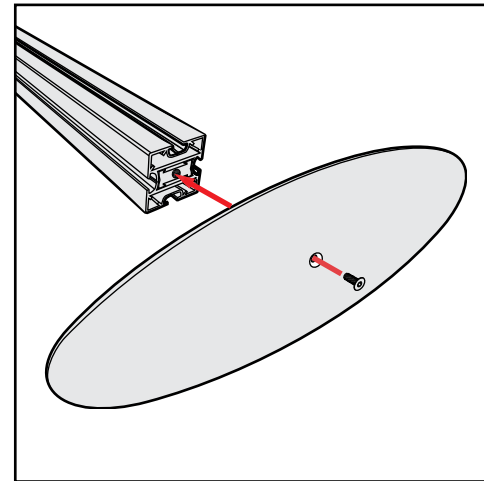


Base Plate & Extrusion Connection




DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED

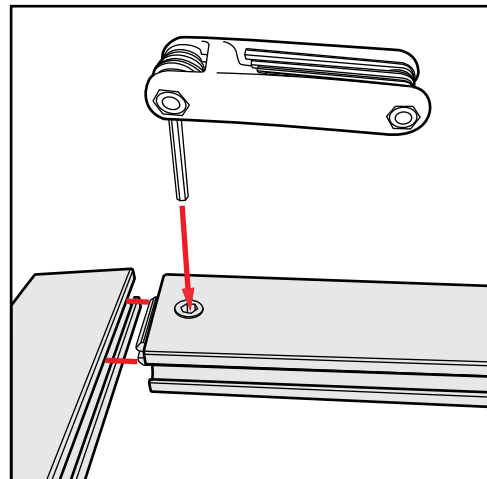

Extrusion & Lock Connection

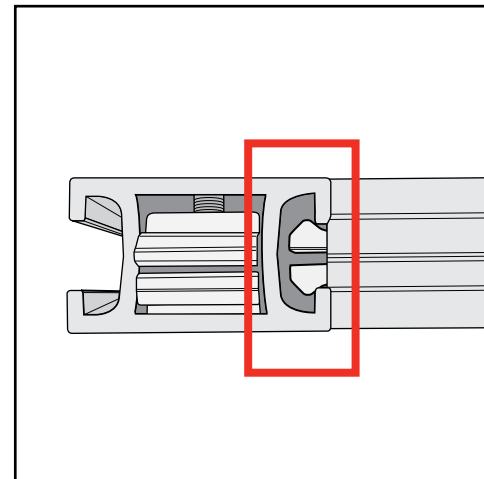


Engaged Lock




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


### Top View of Each Level

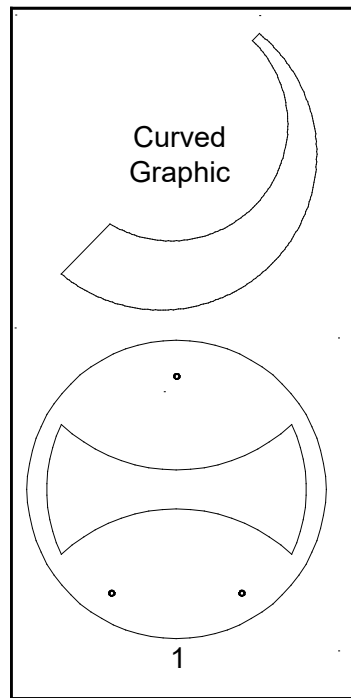


Level 1  
(Bottom level)

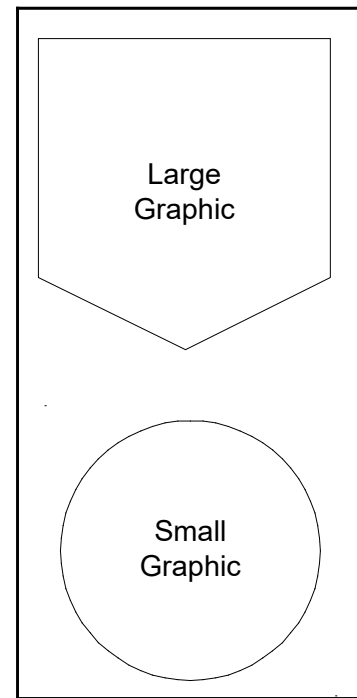


Level 2

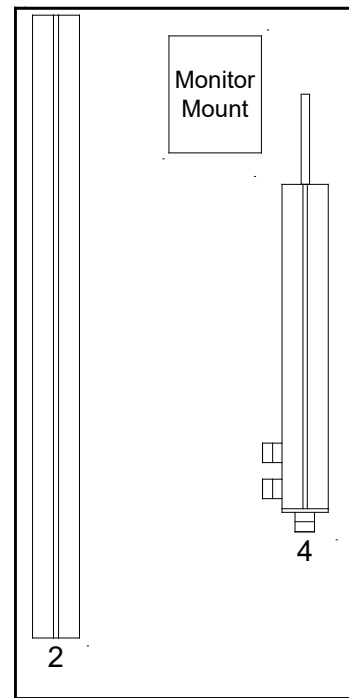

Level 3

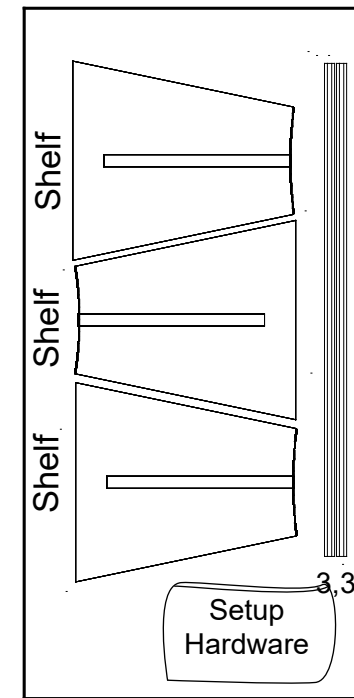

Level 4

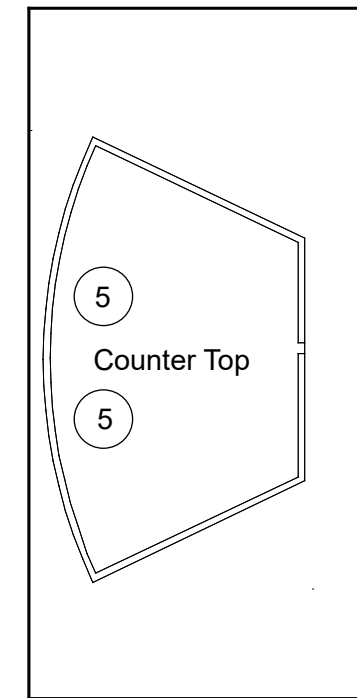

Level 5